


TOP VIEW

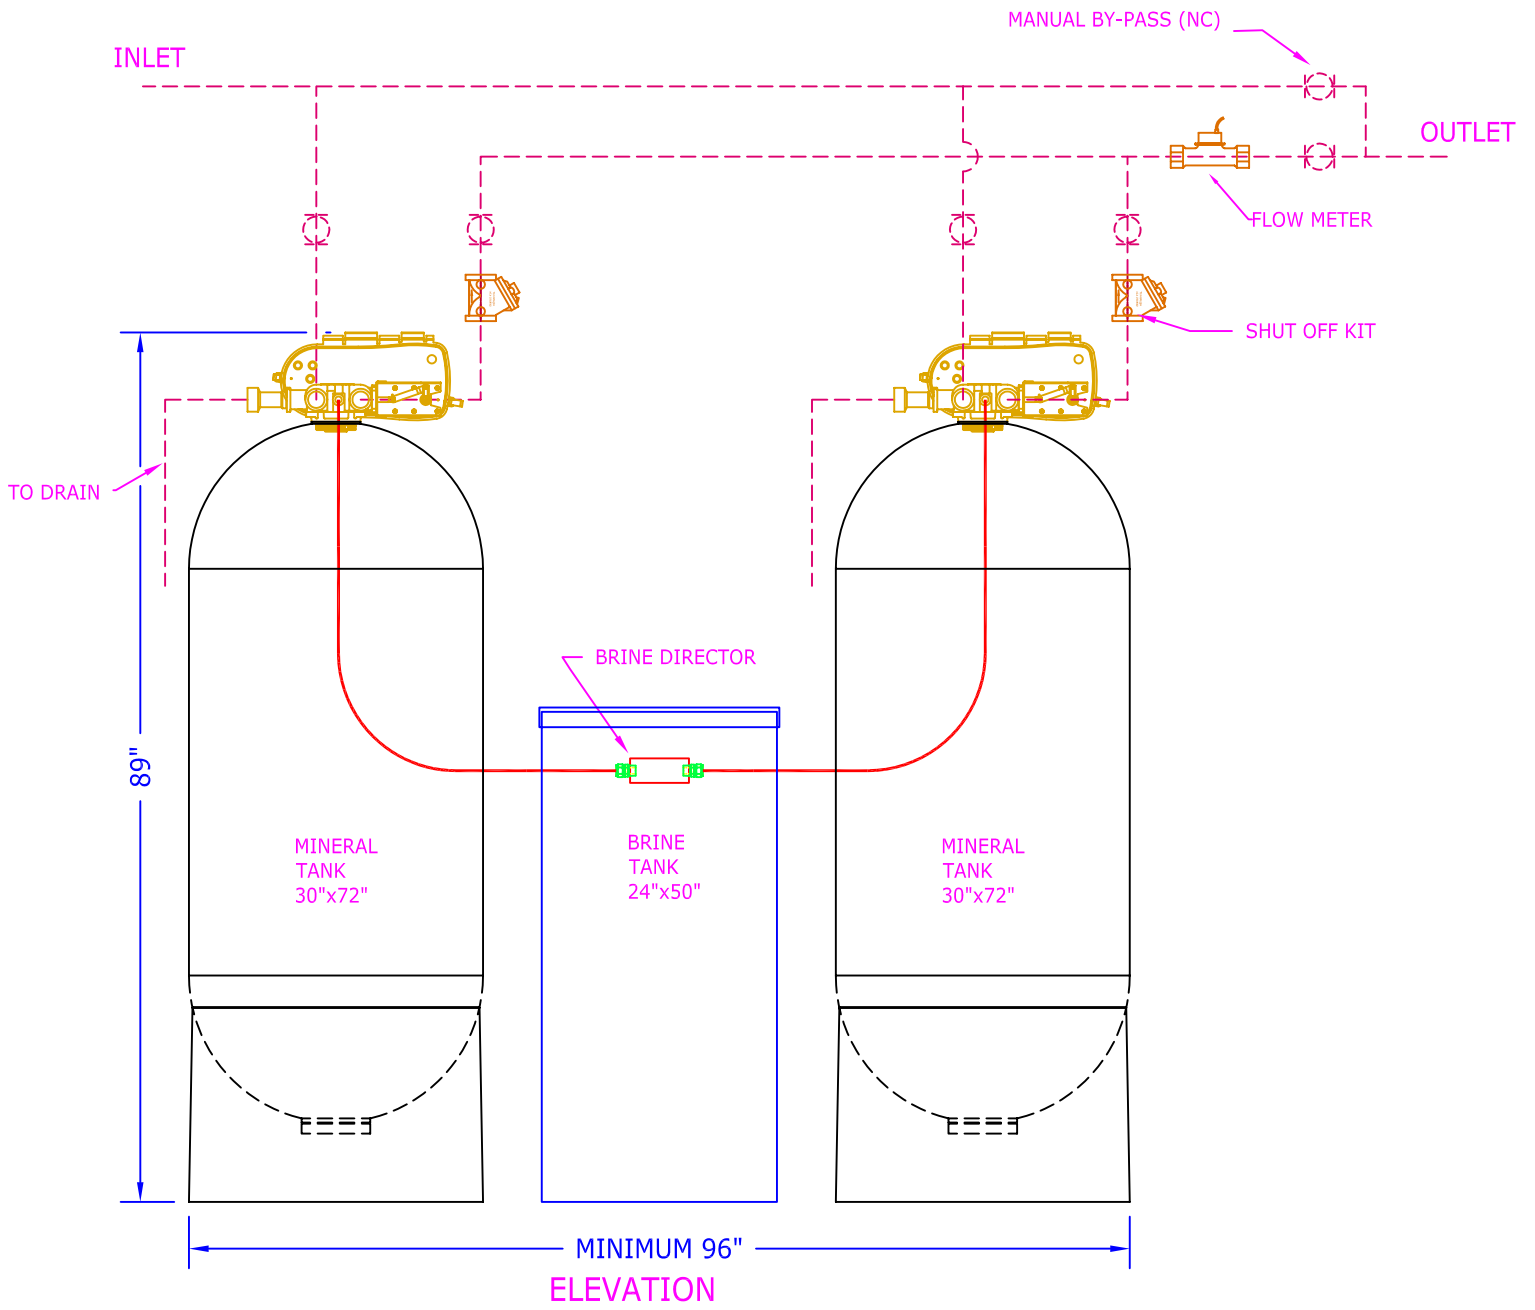

- NOTES:
- 1) PIPING SHOWN IN DASHED LINES TO BE SUPPLIED BY CUSTOMER.
  - 2) ALLOW 1 FOOT ABOVE TANKS FOR LOADING.
  - 3) FLOW METER REQUIRES (15) PIPE DIAMETER LENGTHS BEFORE METER & (10) AFTER FOR PROPER OPERATION.
  - 4) FLOW METER SHOULD BE MOUNTED HORIZONTALLY.

SHIPPING WEIGHT	2115 Lbs.
OPERATING WEIGHT	

BY:	No.	REVISION	DATE	CK'D
RLR	0	SUBMITTAL FOR APPROVAL	03/29/2011	JEB

Water King

102 Charbonnet Rd., Duson, Louisiana, 70529, U.S.A. Telephone: (337) 988-2360 \* Fax: (337) 981-7922

910302-11 RF-300 TWIN ALTERNATING SOFTENER GENERAL ARRANGEMENT		
SCALE	DRAWING NUMBER	SHEET
N.T.S.	RF-300-1.5-TA	01 / 01
<a href="http://www.waterking.com">www.waterking.com</a>		

J:\Drawings\catalog\RF\RF-300-1.5-TA.dwg, 5/6/2011 11:59:07 AM, Adobe PDF, Letter, 1:19.5896, Water King Inc.