


TOP VIEW

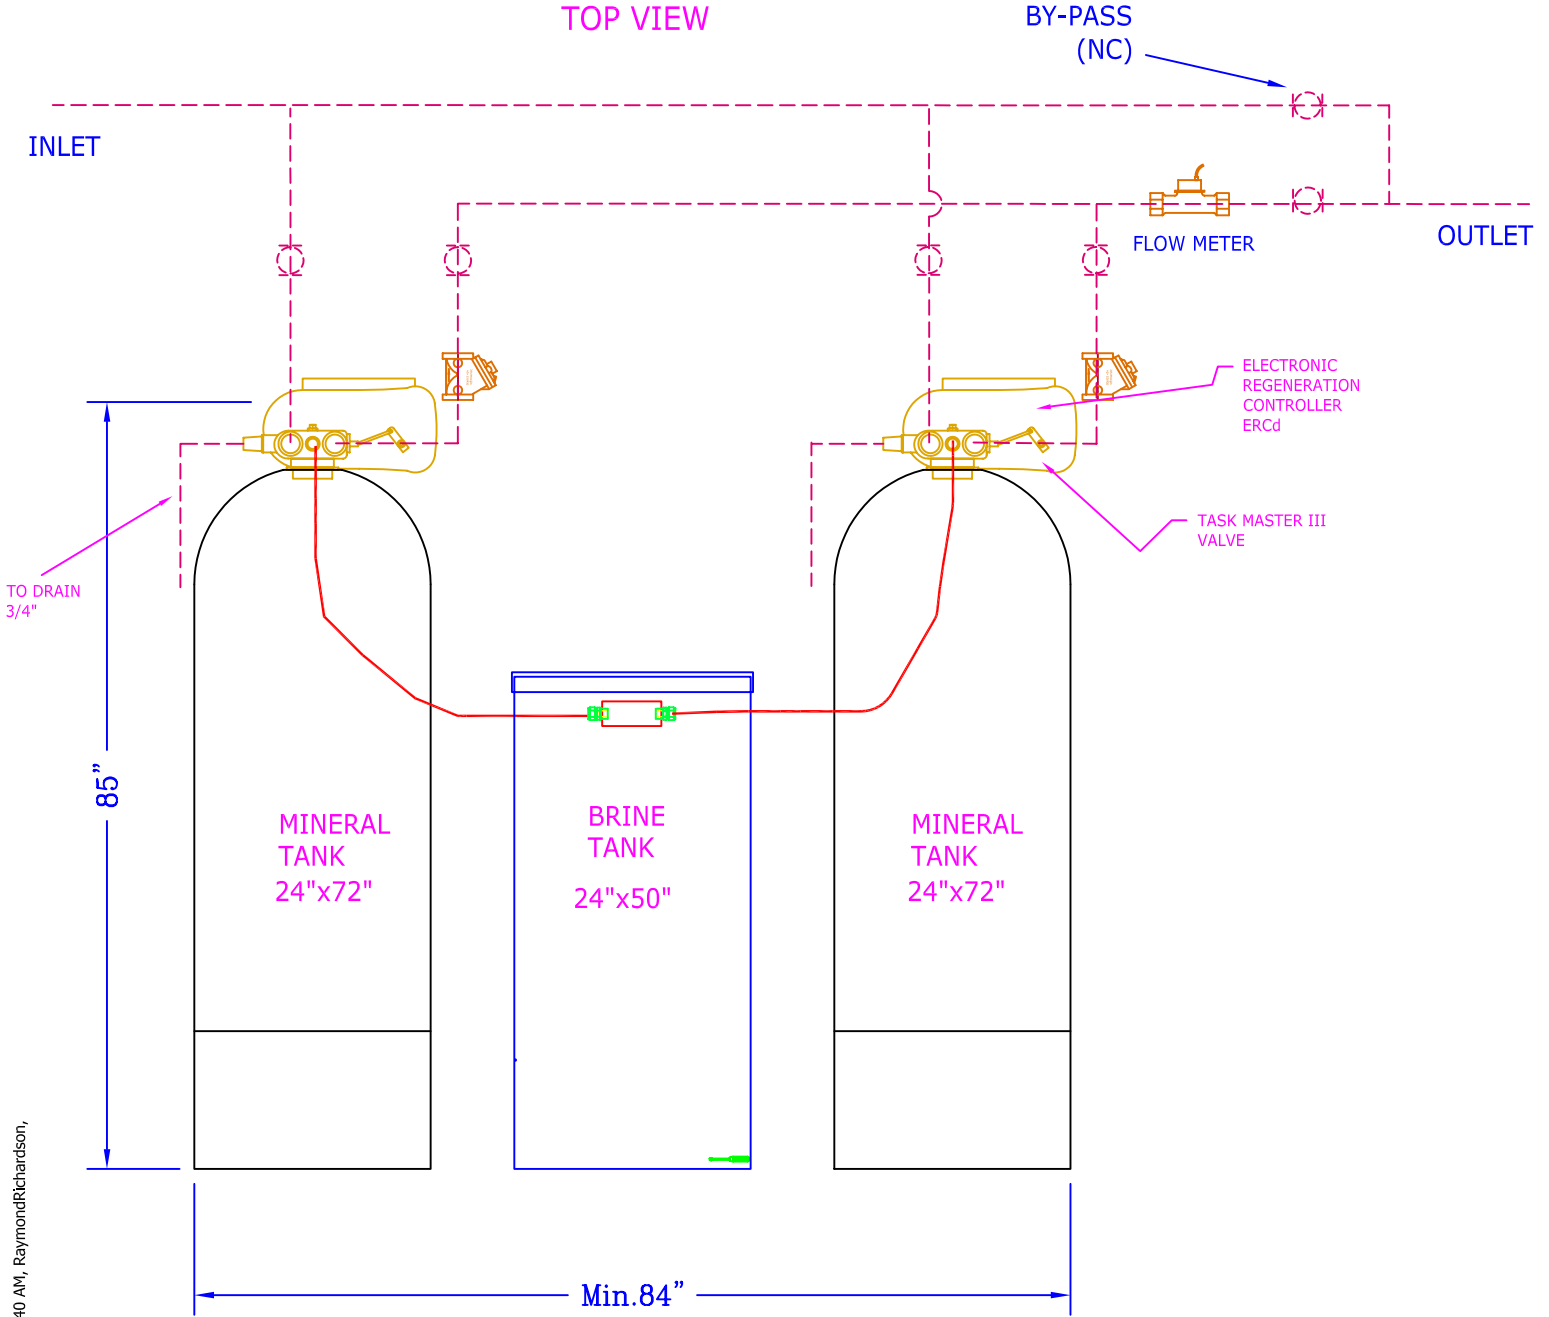

FRONT VIEW

NOTES:

- 1) PIPING SHOWN IN DASHED LINES - SUPPLIED BY CUSTOMER
- 2) ALLOW 1 FOOT ABOVE TANKS FOR LOADING
- 3) FLOW METER REQUIRES (15) PIPE DIAMETER LENGTHS BEFORE METER & (10) AFTER FOR PROPER OPERATION
- 4) FLOW METER SHOULD BE MOUNTED HORIZONTALLY

J:\Drawings\catalog\RF\WKRF240T.dwg, 3/15/2011 11:04:40 AM, RaymondRichardson, Adobe PDF, Letter, 1:19.5009, Water King Inc.

BY:	No.	REVISION	DATE	CK'D
.	0	PRELIMINARY	10/04/99	.
	1	UP-DATE CONTROL VALVE	9/25/2007	
	2	UP-DATE , ADD TOP VIEW	03/15/2011	



910242-11		
RF-240 TWIN ALTERNATING		
TYPICAL PIPING ARRANGEMENT		
SCALE @ 24"x36"	DRAWING NUMBER	SHEET
N.T.S.	WKRF240T	01 / 0 1
www.waterking.com		

SHIPPING Wt. 1390 lbs.
OPERATING Wt. .