


TOP VIEW

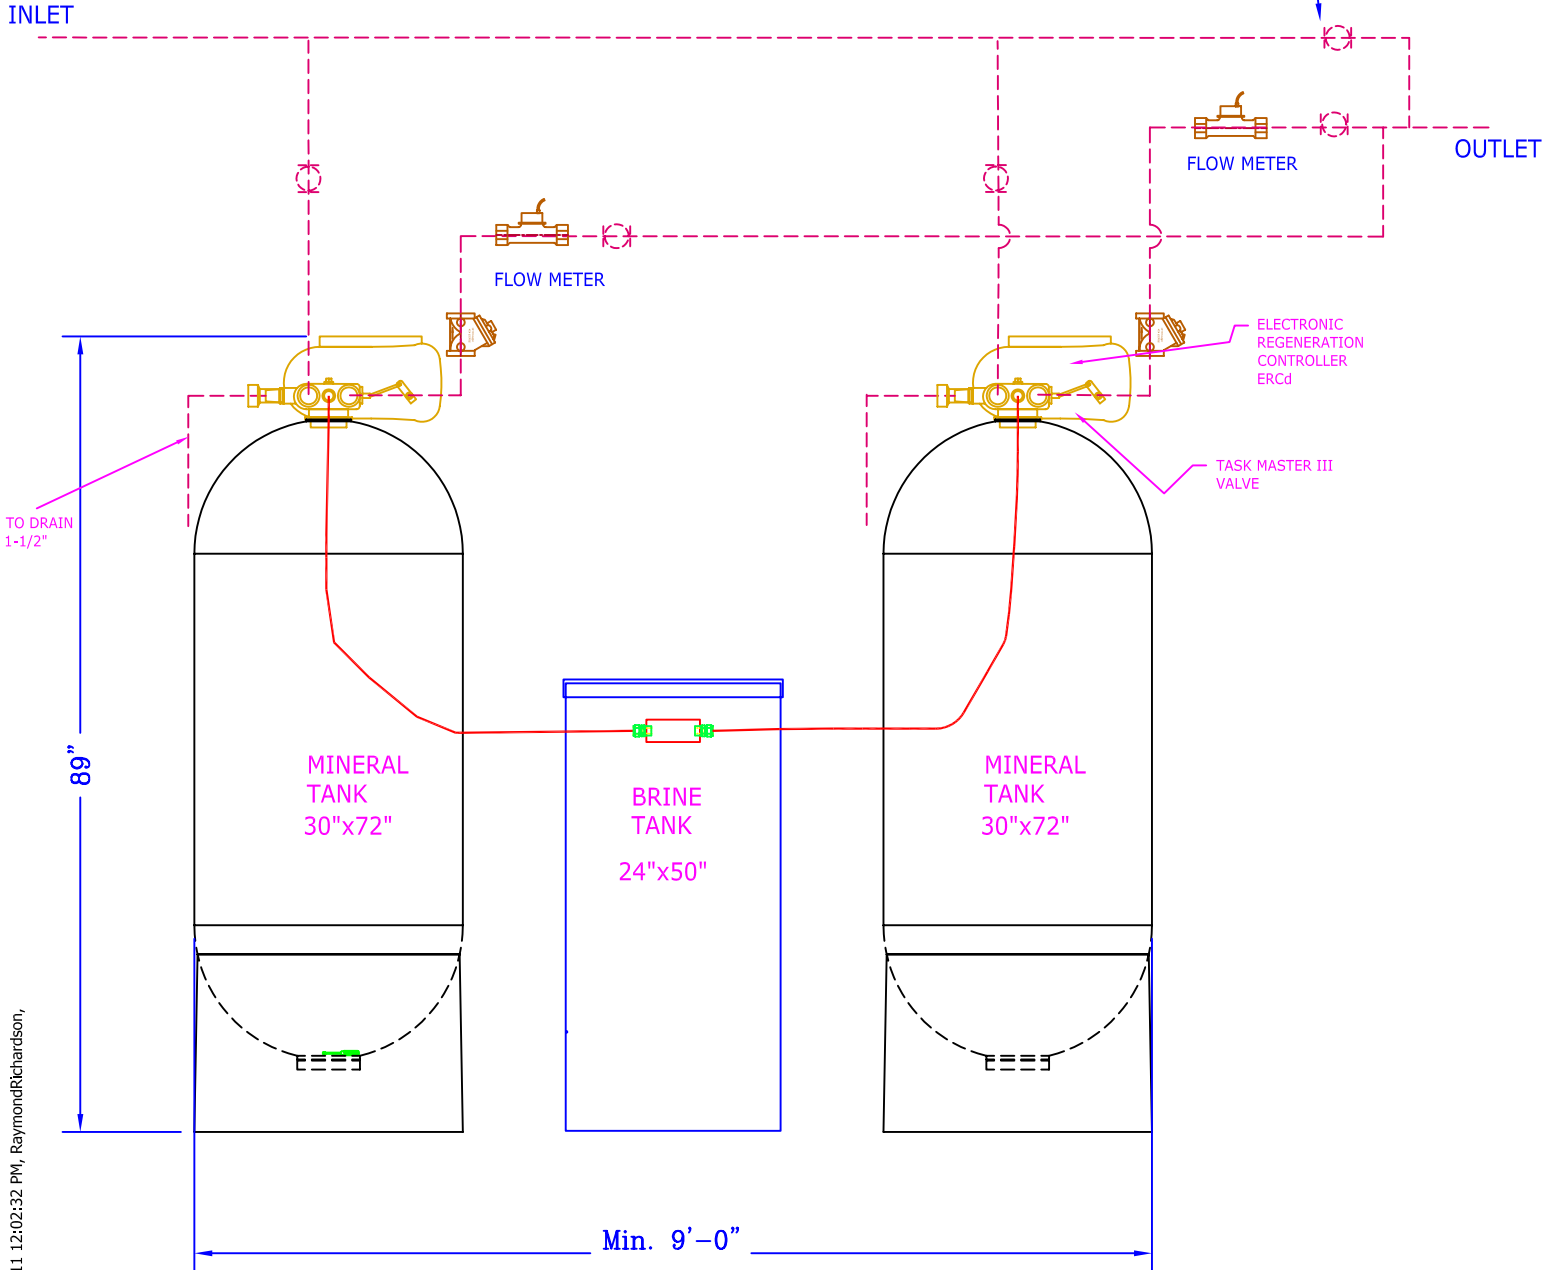

FRONT VIEW

- NOTES:
- 1) PIPING SHOWN IN DASHED LINES - SUPPLIED BY CUSTOMER
 - 2) ALLOW 1 FOOT ABOVE TANKS FOR LOADING
 - 3) FLOW METER REQUIRES (15) PIPE DIAMETER LENGTHS BEFORE METER & (10) AFTER FOR PROPER OPERATION
 - 4) FLOW METER SHOULD BE MOUNTED HORIZONTALLY

J:\Drawings\catalog\RF\WKRF300T.p.dwg, 3/15/2011 12:02:32 PM, RaymondRichardson, Adobe PDF, Letter, 1:21,4509, Water King Inc.

SHIPPING WT. 2525 Lbs.
OPERATING WT. 1000 Lbs.

BY:	No.	REVISION	DATE	CK'D
.	0	PRELIMINARY	07/13/06	.
.	1	UP-DATE BRINE TANK	03/17/2009	.
.
.
.
102 Charbonnet Rd., Duson, Louisiana, U.S.A. 70529				



Telephone: (337) 988-2360 * Fax: (337) 981-7922

910302		
RF-300 TWIN PARALLEL SOFTENER TYPICAL PIPING ARRANGEMENT		
SCALE @ 24"x36"	DRAWING NUMBER	SHEET
N.T.S.	WKRF300T	01 / 0 1
www.waterking.com		