


TOP VIEW

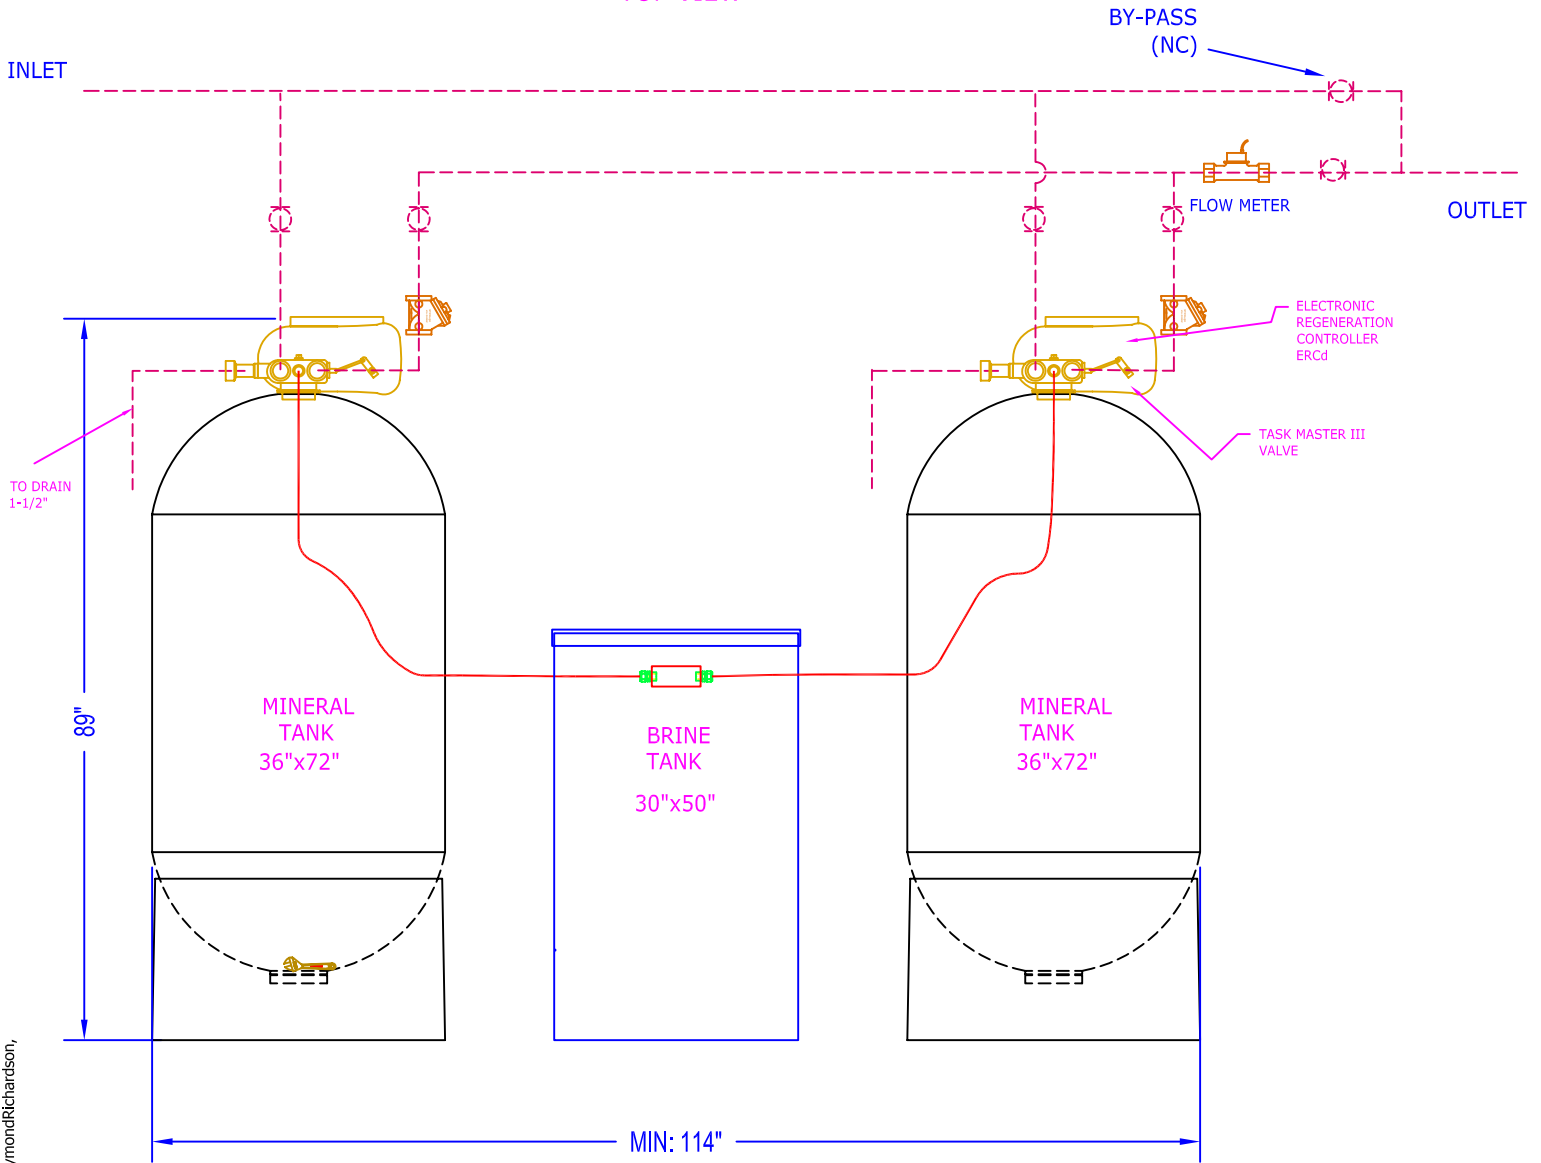

FRONT VIEW

NOTES:

- 1) PIPING SHOWN IN DASHED LINES - SUPPLIED BY CUSTOMER
- 2) ALLOW 1 FOOT ABOVE TANKS FOR LOADING
- 3) FLOW METER REQUIRES (15) PIPE DIAMETER LENGTHS BEFORE METER & (10) AFTER FOR PROPER OPERATION
- 4) FLOW METER SHOULD BE MOUNTED HORIZONTALLY

J:\Drawings\catalog\RF\WKRF450T.dwg, 3/15/2011 1:21:56 PM, RaymondRichardson, Adobe PDF, Letter, 1:23.596, Water King Inc.

SHIPPING WT.	2525 lbs.
OPERATING WT.	

BY:	No.	REVISION	DATE	CK'D
	0	PRELIMINARY	03/27/2003	
	1	UP-DATE BRINE TANK	03/17/2009	
	2	ADD TOP VIEW	03/15/2011	



910452-11		
RF-450 TWIN ALTERNATING SOFTENER TYPICAL PIPING ARRANGEMENT		
SCALE @ 24"x36"	DRAWING NUMBER	SHEET
N.T.S.	WKRF450T	01 / 0 1
www.waterking.com		

102 Charbonnet Rd., Duson, Louisiana, U.S.A. 70529

Telephone: (337) 988-2360 * Fax: (337) 981-7922